



INSTALLATION GUIDE

2008+ Audi Downpipe System

Congratulations on your purchase of the AWE Tuning exhaust downpipes for 2008+ Audis.

Exquisite build quality with industry leading performance distinguishes this downpipe system from all others.

Contact us with any installation questions.

215-658-1670

AWE-Tuning.com

performance@AWE-Tuning.com

PARTS LIST

- 1 driver side flex section (CG1)
- 1 passenger side flex section (CG2)
- 2 resonator (or tube) section (CG3 or CG5)
- 6 M8 x 30mm SS bolt
- 6 M8 washer
- 6 M8 copper exhaust nut
- 2 manifold to downpipe gasket
- 2 2.50" exhaust band clamp

Step 1

Before removing the factory downpipes, first soak the fasteners in a penetrating oil for several hours to ensure easy removal.

Fasteners and gaskets are included with the downpipes to replace the factory parts. Use a quality anti-seize compound on all fastener threads during re-assembly.

On 2013+ model year cars, using our specially created downpipe removal tool helps greatly in accessing some of the difficult factory fasteners.


Step 2

With the system completely cool:

While underneath and looking towards the front of the car, as in **Figure 1**, rotate the LEFT side AWE Tuning downpipe resonator clockwise, as far as it will go until it hits the tunnel, and then back it off a few mm. Do the same with the RIGHT side one, rotating it counter clockwise.

If non-resonated downpipes are being installed, rotate the lower sections so that sufficient clearance is gained at the tunnel cross brace that runs beneath them.

After properly adjusting, tighten the clamps that attach the lower sections to the downpipe upper sections to 40 ft/lbs.

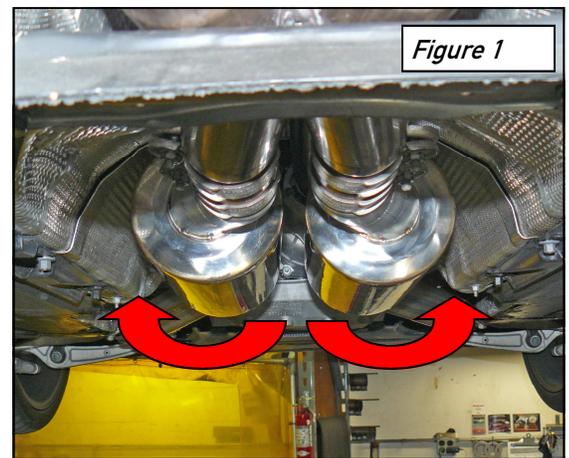

ENJOY



Any questions or comments,
please do not hesitate to contact us:

215-658-1670

AWE-Tuning.com

performance@AWE-Tuning.com



AWE Tuning
199 Precision Drive
Horsham, PA 19044
215-658-1670
performance@AWE-Tuning.com

Thank you for choosing AWE Tuning as your performance automotive parts supplier. Please remember that a performance car is only as strong as its weakest link. Therefore, it is vital that you maintain your vehicle to factory specifications.

By installing or using the purchased product, the Consumer accepts this warranty and any specific Manufacturer warranties enclosed.

Limited Warranty

The following warranty is valid only in the United States.

The Manufacturer's full warranty applies to all products sold.

Secor Ltd. (AWE Tuning) warrants to the original retail purchaser (Consumer) this product (Audi Downpipes) against manufacturing defects for LIFETIME.

Upon verification of warranty coverage, AWE Tuning will repair or replace the defective product at their discretion, without charge. This is the only remedy the Consumer has for any loss or damage, however arising, due to nonconformity in or defect of the product. This warranty does not cover consequential damage, loss of time or revenues, inconvenience, installation costs, shipping costs, loss of use of vehicle, damage to the vehicle or components, or other incidental or indirect damage.

All warranties are void if the product was not installed by a certified auto mechanic, improperly serviced, modified, or used in a way not intended by the Manufacturer. Use of product in Motorsports or Racing conditions is grounds for warranty denial. Motorsports and Racing is an inherently abusive operational condition, and it is impossible to warranty for this type of usage.

The Consumer is responsible for ensuring that the product is installed in a safe and proper manner, and should cease usage of the product immediately if an unsafe or improper condition is noted. If an unsafe or improper condition is noted, the Consumer should then immediately contact the facility where the product was installed or AWE Tuning directly.

Please contact the original place of purchase for any warranty claims or explanations of this document.